

**System Data Sheet**

Edition 02/12/2013

**Sika® -DecoQuartz**

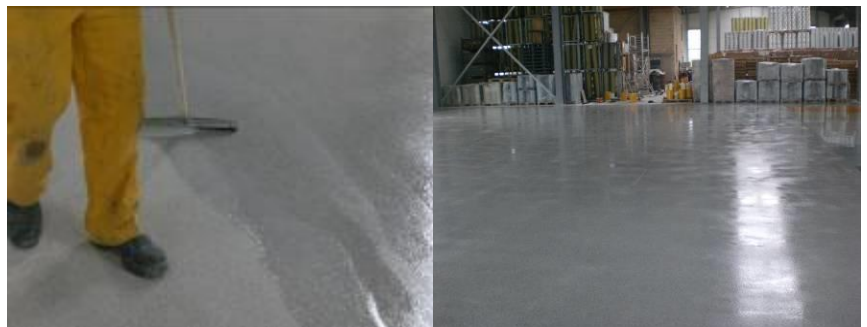
(Template for local translation, only for internal use)

**Sika® -DecoQuartz**

Decorative quartz, slip resistant, designed for indoor application

**System Description**

Sika® -DecoQuartz decorative, slip resistant flooring system based on Sikafloor® -169 a two part, very low yellowing, low viscous, transparent epoxy resin.  
 "Total solid epoxy composition acc. to the test method Deutsche Bauchemie e.V. (German Association for construction chemicals)"



**Application field**

- Industrial (e.g. Manufacturing)
- Transportation (e.g. Airports)
- Retail (e.g. Shopping Malls)

**Characteristics / Performance**

- Decorative / functional
- Low VOC-content
- Very good UV resistance
- Good mechanical and abrasion resistance
- Slip resistant
- Easy application

**Approval / Standards**

Fire classification of Sika® -DecoQuartz in accordance with EN 13501-1, classification report-No. 2010-1870-K1, Exova Brandhaus, Germany, August 2010.

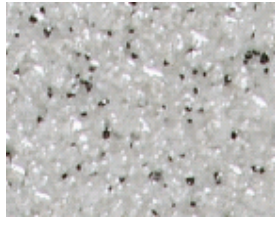
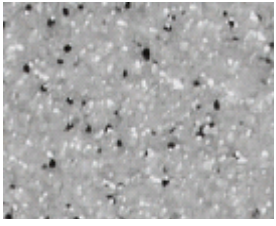
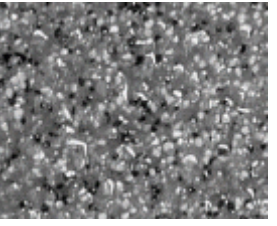

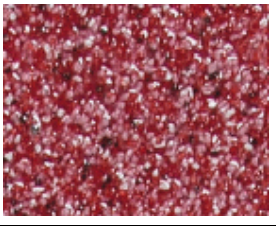
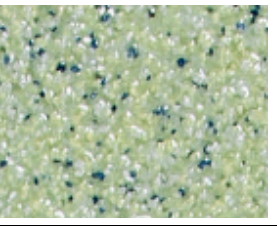
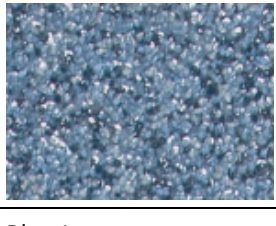

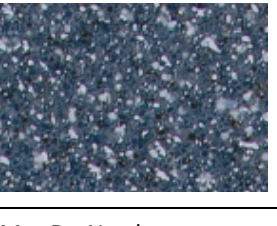
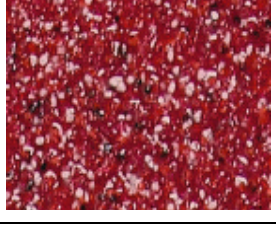
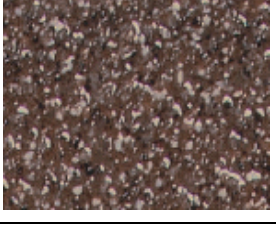






**System Data**

**Form**

**Appearance / Colours**

Sika® -PU Quartz 0,3-0,8mm or 0,7-1,2mm:

		
Iceberg	Hiero	Noblesse
		
Amande	Framboise	Fleur De Tilleul
		
Blue Jean	Nougat	Mer Du Nord
		
Bordeaux	Granit	Pêche
		
Dune	Sanguine	Sable

Other colour mixes available on request.

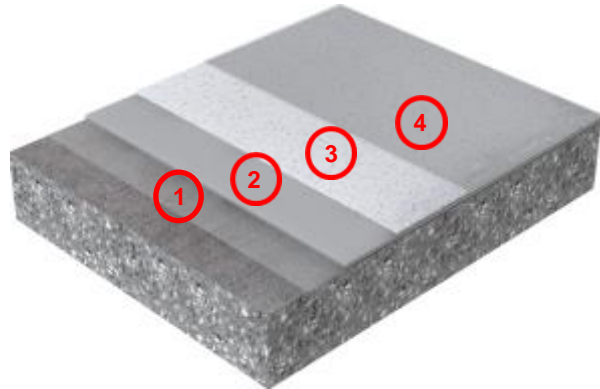
Under UV-exposure some discolouration (yellowing) will occur, however this has no influence on the function and performance of the coating.

## Resistance

**Chemical Resistance** Resistant to many chemicals. Please ask for a detailed chemical resistance table.

## System Information

### Systems Structure



#### *Sika®-DecoQuartz System (~2-3 mm)*

- ① Primer: 1-2 x Sikafloor® -156, 161 or 169
- ② Wearing course: Sikafloor® -263 SL or 264 pigmented approx. the same like the following Sika®-PU Quartz
- ③ Broadcast: broadcast in excess with Sika®-PU Quartz 0,3-0,8 mm or 0,7-1,2 mm
- ④ Seal coat: 1-2 x Sikafloor® -169

## Application

The relevant informations about application and maintenance of a Sika® -DecoQuartz System are available in the Product Data Sheets of the used Sikafloor products and in the Method Statement of the Sika®-DecoQuartz System.

The Method Statement contains the fully detailed system description as well as all the instructions for the different application steps such as surface preparation, substrate and environmental (temperature, relative humidity) control, mixing and application of the system.

## Consumption / Dosage

Coating System	Product	Consumption
<i>Sika-DecoQuartz System (~2-3 mm)</i>		
Primer	1-2 x Sikafloor® -156, 161 or 169	1-2 x ~0.3- 0.5 kg/m <sup>2</sup>
Wearing course	Sikafloor® -263 SL or 264 pigmented approx. the same like the following quartz sand	~ 0.8 kg/m <sup>2</sup>
Broadcast	Broadcast in excess with PU coated colored quartz sand (0,3-0,8 or 0,7-1,2 mm)	~3.0-4.0kg/m <sup>2</sup> (quartzsand)
Seal coat	1-2 x Sikafloor® -169	~0.6-0.9 kg/m <sup>2</sup> per layer

**Value Base**

All technical data stated in this Product Data Sheet are based on laboratory tests. Actual measured data may vary due to circumstances beyond our control.

**Legal Notes**

The information, and, in particular, the recommendations relating to the application and end-use of Sika products, are given in good faith based on Sika's current knowledge and experience of the products when properly stored, handled and applied under normal conditions in accordance with Sika's recommendations. In practice, the differences in materials, substrates and actual site conditions are such that no warranty in respect of merchantability or of fitness for a particular purpose, nor any liability arising out of any legal relationship whatsoever, can be inferred either from this information, or from any written recommendations, or from any other advice offered. The user of the product must test the product's suitability for the intended application and purpose. Sika reserves the right to change the properties of its products. The proprietary rights of third parties must be observed. All orders are accepted subject to our current terms of sale and delivery. Users must always refer to the most recent issue of the local Product Data Sheet for the product concerned, copies of which will be supplied on request.

**It may be necessary to adapt the above disclaimer to specific local laws and regulations. Any changes to this disclaimer may only be implemented with permission of Sika® Corporate Legal in Baar.**



Sika Services AG  
Tüffenwies 16  
CH-8048 Zurich  
Switzerland

Phone +41 44 436 40 40  
Telefax +41 44 436 46 86  
www.sika.com

